

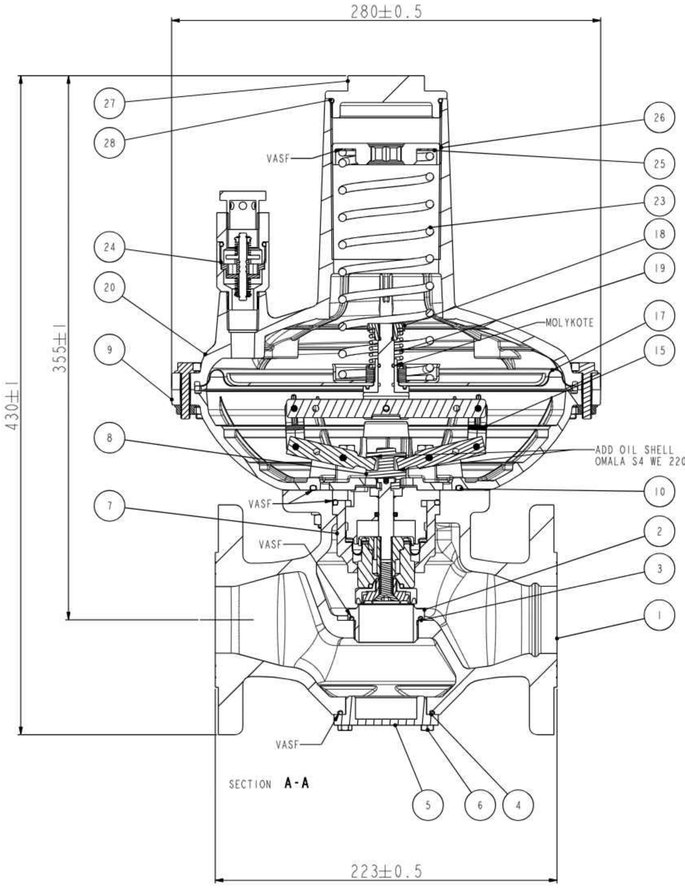


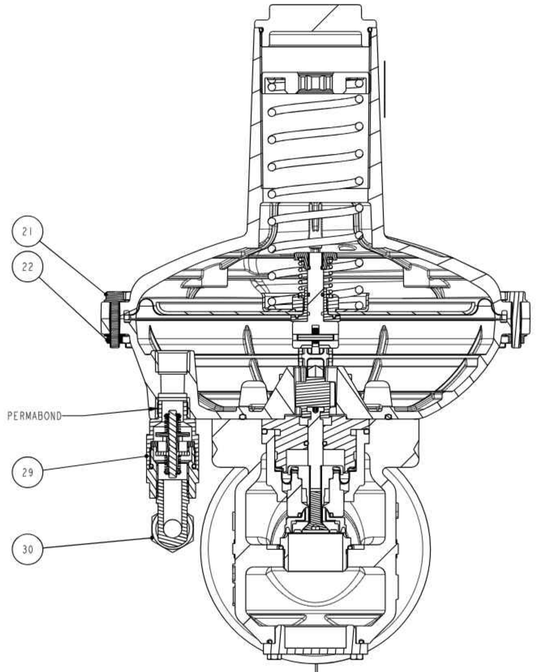

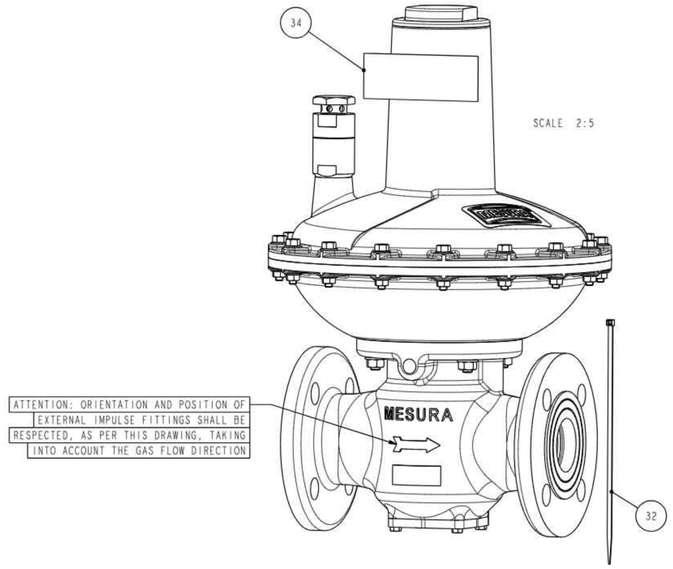

THE INSTRUCTION MUST BE INSERTED IN A PERFORATED BAG AND SECURED WITH A CLAMP TO THE REGULATOR FLANGE


S.I.M.E
A.E.


REGULATOR ADHESIVE LABEL

MESURA®
cavagna group MANUFACTURER
Via Matteotti, 5
25012 CALVISANO (BS)
MADE IN ITALY
CE

Regulator		S22-1 BP	Serial N° E <N>		EN334		Year xxxx
DN 40	TS	Cl. 2 -20°C +60°C	Pu max	6 bar	Pds	50	mbar
PN 16/25	PS	20 bar	Bpu	0,5-5 bar	Wds	40-95	mbar
AC 10	PSD	6 bar	Fluid	NATURAL GAS	Wd	12-150	mbar
SG 20	Strength	IS	Type	Fail to open	Cg	750	Weight x,x kg

ATTENTION: ORIENTATION AND POSITION OF EXTERNAL IMPULSE FITTINGS SHALL BE RESPECTED, AS PER THIS DRAWING, TAKING INTO ACCOUNT THE GAS FLOW DIRECTION

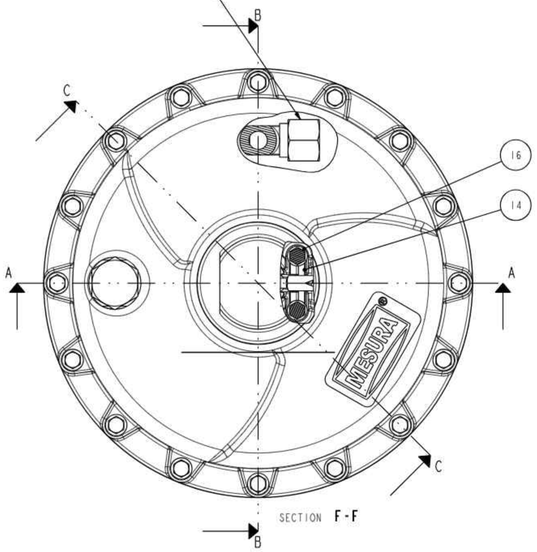

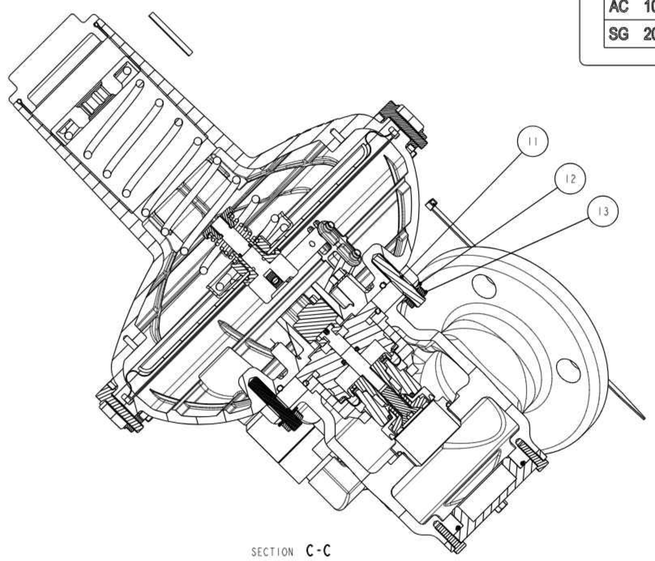

LABEL FOR EXPEDITION BOX

Pressure Regulator
S22-1 BP DN40 PN16/25
Code 22-R-120-0005
Calibration Pds: 50 mbar
Serial N.: E<N>
MADE IN ITALY
34-I-210-7854

NO	NO PRODUCT	DENOMINATION	Q.TY
1	00-1-950-0292	S/A PAINTED BODY S22 DN40 PN16/25 LT	1
2	16-1-110-1804	ORIFICE Ø35.5 S22 BP	1
3	04-1-110-0624	O RING Ø42,52X2,62(3530806010082)	1
4	04-1-110-0113	O-RING Ø56.82 X 2.62	1
5	20-1-110-0279	CAP FOR NO VSI VERSION	1
6	14-1-110-0171	SCREW M5 - L=18	4
7	40-1-950-0329	S/A BALANCED REGULATING SYSTEM S22 BP	1
8	21-1-110-0504	QUICK COUPLER S22 REGULATOR	1
9	01-1-950-0292	S/A PAINTED S22 LOWER COVER	1
10	04-1-110-0671	O RING Ø91,67x3,53(3530806010127)	1
11	14-1-110-0145	TRAPPED SCREW M8(1530011202920)	4
12	15-1-110-0187	PLAIN WASHER D8-ZN(3532015001003)	4
13	10-1-110-1067	NUT M8 UNI5588(3400112O7)	4
14	05-1-110-0110	LEVER PIN Ø4X30	2
15	02-1-950-0089	S/A LEVER FOR S22 BP/MP	1
16	14-1-110-0198	SCREW TE M6x16	4
17	09-1-950-0290	S/A DIAPHRAGM BP	1
18	08-1-110-0117	SPRING ADJUSTMENT (1530421201583)	1
19	07-1-110-1165	SPRING DAMPER (1530201201894)	1
20	01-1-950-0293	S/A PAINTED S22 SUPERIOR COVER	1
21	14-1-110-0214	KNURLED SCREW TEF M6x30 ZN	16
22	10-1-110-1085	KNURLED NUT WITH COLLAR M6 ZN	16
23	07-1-110-0902	REGULATION SPRING (1530201202186)	1
24	19-1-950-0107	S/A SUPERIOR DAMPER BP (1561001200236)	1
25	15-1-110-0198	WASHER (1530201202536)	1
26	08-1-110-0137	SPRING ADJUSTMENT BP-MP	1
27	19-1-110-0123	COVER CAP	1
28	04-1-110-0704	O-RING Ø67.95x2.62	1
29	19-1-950-0108	S/A IMPULSE GRIP DAMPER BP (1561001200242)	1
30	30-1-110-0430	FITTING TN94-14SR 1/2" CONICAL	1
31	23-1-210-0813	POLYBAG 160x110	1
32	20-1-110-0517	CABLES TIES 200x3.6 mm - Ø MAX 50 mm	1
33	34-1-110-1908	S22 INSTRUCTION - EN	1
34	34-1-310-1920	REGULATOR ADHESIVE LABEL	1
35	23-1-210-1136	INSERT FOR SINGLE BOX S22 SERIES	2
36	23-1-210-1137	SINGLE BOX (MESURA LOGO)	1
37	34-1-210-7854	LABEL FOR EXPEDITION BOX	1

cavagna group

DENOMINATION: S22-1 BP DN40 PN16/25 Pds50 WITH SAFETY — NATURAL_GAS 50mbar — N.A.

	MODEL	ORIFICE	INLET	OUTLET	SHAPED	PROD. INT. GROUP
RECA	S22	Ø35.2	DN40-PN16	DN40-PN16	N.A.	-

PERFORMANCE DOC.	COUNTRY	COUNTRY SPECIFIC	WEIGHT	SCALE	MODIFY FILE	PRODUCT NO	REV
N.A.	SOUTH AFRICA	N.A.	N.A.	1:2	N.A.	22-R-120-0005	0

PROD. EVOLUTION	PROJECT NO	RELEASE LEVEL	DRAWN BY	VERIFIED BY	APPROVED BY	DATE
DEFINITIVE	DNG08852	STUDY WIP	CIGOLINI M.	PEDRETTI A.	TOMASELLI L.	18/12/23

Questo disegno non può essere riprodotto, né comunicato a terzi, senza autorizzazione scritta della Cavagna Group Div. RE.CA. Via Matteotti, 5 Calvisano BS - Italy